


3,000 psi concrete with  
 fiber mesh reinforcing and  
 6"x 6" / 10x10 welded wire fabric

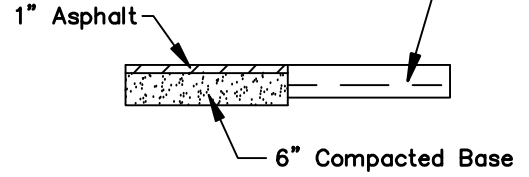

TYPICAL CROSS SECTION IN R.O.W.

NOTE:  
 No driveway may be configured to  
 result in construction in front  
 of adjacent property as property  
 line is extended to curb or  
 pavement.

## STANDARD DRIVEWAY LOCATIONS RESIDENTIAL

CITY INDEX NO. 103; 2 OF 2  
 N.T.S.

				CITY OF CLEARWATER, FLORIDA ENGINEERING DEPARTMENT		
				REDRAWN BY Novo	STANDARD DRIVEWAY	DATE 01/09
				CHECKED BY D.G.B.	LOCATIONS RESIDENTIAL	INDEX NO. 103
REV.	DATE	DESCRIPTION	APP.	DESIGNED BY W.C.B.		2 OF 2